

FIP11C

3-Line Business IP Phone

FIP11C is designed for easy deployment saving corporates and service providers time and money on installations. The 2.3 inch colour display comes with a new UI design, providing you with a rich visual experience. The programmable keys offer extensive productivity-enhancing features such as PoE, HD voice, and easy access to various Wi-Fi options. The FIP11C also supports Opus and offers a 10/100Mbps dual-port switch with a 300Mbps 2.4GHz Wi-Fi module.



Key Features and Benefits

Simple and Easy to Use UI Design

FIP11C comes with a simple design yet ergonomic design that is easy to use. Prompts guide you through a simple installation process making it easy to start a voice collaboration.

Flexible Deployment

Whether in your office or conference room, say goodbye to the complex deployments, connect with people the way you like. FIP11C supports dual 10/100 Mbps ports, PoE and a built-in 2.4G Wi-Fi connection (300Mbps).

HD Voice Quality

FIP11C provides excellent voice quality. We have created high-definition sound quality solutions for handset and hands-free scenarios, even in a noisy environment.

High Security and compatibility

All conversations are well protected. We make sure of security algorithms such as configuration files utilising AES, SRTP and TLS call encryption. The FIP1X series IP phones are widely compatible with SIP-based PBX platforms such as Asterisk, Broadsoft and 3CX.

- 2.3" 320 x 240 color display
- 3 SIP accounts
- HD Voice
- Opus
- Dual-port 10/100 Mbps Ethernet
- PoE (optional)
- Stand with 3 adjustable angles
- RJ9 headset jack
- 2.4G Wi-Fi
- Wall mountable

Audio Features

- > HD voice: HD handset, HD speaker
- > Codecs: Opus, iLBC, G.722(HD), G.711(A/u), G.729AB, G.723
- > DTMF: In-band, RFC 2833 and SIP info
- > Full-duplex hands-free speakerphone
- > VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- > 3 SIP accounts
- > Call hold, mute, DND, Redial, auto answer
- > One-touch speed dial, hotline, SMS
- > Call forward, call Waiting, , call transfer (attended/blind)
- > Paging, intercom
- > 3-Way conferencing
- > Direct IP call without SIP proxy
- > Set date time manually or automatically
- > Dial rule
- > IP conflict detection
- > 2.4 GHz Wi-Fi

Directory

- > Phone book (500 records)
- > Black list
- > XML/LDAP remote phonebook
- > Phonebook search/import/export
- > Call history: dialed/received/missed (60 records)

IP-PBX Features

- > BLF
- > Anonymous call, anonymous call rejection
- > Voice mail, call park, call pickup
- > Message waiting indicator(MWI)

Feature keys

- > 3 Line keys
- > 7 features keys: message, headset, hold, mute, transfer, redial, hands-free speakerphone
- > 4 Soft Keys
- > 5 Navigate Keys
- > Volume+/-

Display and Indicator

- > 2.3" 320 x 240px Color screen with backlight
- > 16 bit depth color
- > LED for call and message waiting indication
- > Dual-color (red/green) illuminated LEDs for line status information
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name and number
- > Power saving

Interface

- > 2 x RJ45 Ports (Ethernet 10/100 Base-T)
- > Support PoE (Optional)
- > 1 x RJ9 Handset port,
- > 1 x RJ9 Headset port
- > 1 x Power adapter

Management

- > Configuration: browser/phone/auto-provision
- > TFTP/HTTP/HTTPS for Auto Provisioning
- > TR069 (TR104/TR106)
- > Reset to factory, reboot
- > Package tracing export, system log
- > DNS/DNS SRV (RFC 1706, RFC 2782)
- > NAPTR for SIP URI lookup (RFC 2915)
- > Cloud device management: FCMS
- > DHCP server and DHCP client

Other Physical Features

- > Color: Classic Grey
- > Stand with 3 adjustable angles
- > Wall mountable
- > AC/DC Adapter
- AC Input: 100~240V, 50~60Hz
- DC Output: 5V, 1A
- > Power consumption(PSU): 1.5-3.5W
- > Power consumption(PoE): 1.9-4.5W
- > Dimension (W x H x D x T) :
190mm x 188.5mm x 173mm x 41.5mm
- > Relative humidity: 10%~90% (No Condensing)
- > Storage temperature: -25~ 85°C
- > Operation temperature: 0~50°C

Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT Traversal by STUN
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: Static IP and DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > SDP (RFC 2327) , UDP/TCP
- > Mutil-VLAN, DSCP and 802.1p QoS
- > SRTP
- > TLS
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication
- > VPN: PPTP, I2TP, OpenVPN
- > IPv4 /IPv6 ,Dual stack IPv4/IPv6
- > RTP/RTCP (RFC 1889, RFC 1890)
- > ARP/RARP (RFC 826/903)
- > IEEE802.1Q VLAN/802.1p/DSCP
- > SNMPv2
- > LLDP/CDP/DHCP VLAN



Package

- > Flyingvoice FIP11C IP Phone
- Handset with handset cord
- Ethernet cable
- Stand
- Quick start guide
- Power adapter (Optional)
- > Qty/CTN: 10 PCS
- > N.W/CTN: 8.75 kg
- > G.W/CTN: 9.48 kg
- > Giftbox size: 270mm x 195mm x 78mm
- > Carton Meas: 420mm x 420mm x 290mm

Certified by



Compatible with

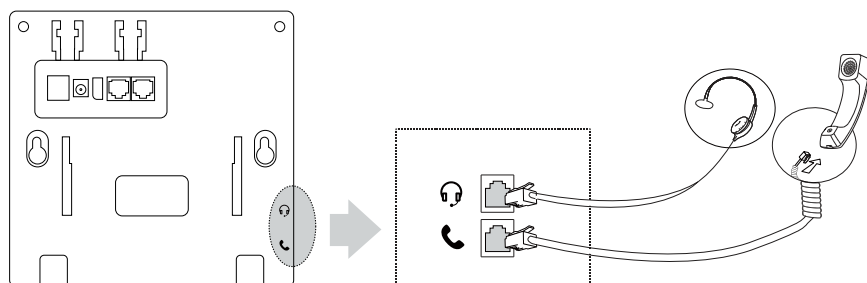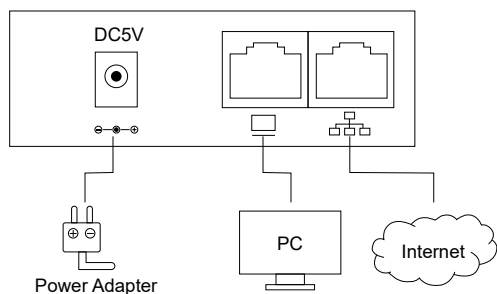

About Flyingvoice

Flyingvoice is a leading manufacturer of VoIP phones, ATA& gateways and VoIP routers. These products are preferred globally by international carriers, ITSP's, ISP's, corporate companies, and home users alike.

Driven by a need for ongoing innovation within VoWLAN technologies, Flyingvoice is committed to manufacturing products that allow for ease-of-installation scenarios within an enterprise network. Our people continuously improve existing products as well as expand upon product applications tailored to clients' requirements. These improvements ensure that your experience provides for secure, effective and efficient collaboration – anytime & anywhere.

Copyright

Copyright © Flyingvoice Technology Co., Ltd. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Flyingvoice Technology Co., Ltd.

Technical Support

Visit www.flyingvoice.com for product documents and FAQ, or contact Flyingvoice by email at support@flyingvoice.com. We'll get you the help you need.



Flyingvoice Technology Co., Ltd.

Website: www.flyingvoice.com

Add: Rm 207-209, Unt B52, Zhong Chuang Industrial Park, Nan
Shan District, Shen Zhen, Guangdong, China

Copyright© Flyingvoice Technology Co., Ltd. All Rights Reserved